

Taylor University

Pillars at Taylor University

Faculty-Mentored Undergraduate Scholarship

Academic Departments & Programs

Summer 2021

3D-Printing Habitable Structures on Mars

Addison Johnson
Taylor University

John Pugsley
Taylor University

Andrew Scherer
Taylor University

Follow this and additional works at: <https://pillars.taylor.edu/fmus>



Part of the [Engineering Commons](#), and the [Physics Commons](#)

Recommended Citation

Johnson, Addison; Pugsley, John; and Scherer, Andrew, "3D-Printing Habitable Structures on Mars" (2021).
Faculty-Mentored Undergraduate Scholarship. 1.
<https://pillars.taylor.edu/fmus/1>

This Poster is brought to you for free and open access by the Academic Departments & Programs at Pillars at Taylor University. It has been accepted for inclusion in Faculty-Mentored Undergraduate Scholarship by an authorized administrator of Pillars at Taylor University. For more information, please contact pillars@taylor.edu.

3D-Printing Habitable Structures on Mars

Addison Johnson, John Pugsley, Andrew Scherer

Faculty Supervisors: Dr. Peter Staritz and Dr. Josiah McClurg

Taylor University Engineering Department

Project Overview

This project developed technology to 3D-print habitable structures on Mars from in-situ materials, as part of the push to create a self-sustaining colony on Mars.

The team designed a significantly improved printhead over the summer of 2021, expanding on the senior project from the recent engineering graduates. Beyond the print head, the system includes a gantry and XYZ positioning system (below).

Summer goals:

- Improve heating efficiency (reduce energy loss)
- Improve the print quality (consistent and well mixed extrusion with no voids)



Dosing System

Doser goals:


- Portion out the correct ratio of sand and sulfur
- Be able to adjust the ratios of sand and sulfur

Hopper goals:

- Hold enough material to keep the dosers supplied
- Allow material to freely enter to the dosers without clogging

Design:

- Two compartments hold sand and sulfur
- An auger under each compartment carries materials towards the mixer
- A vibrating brush prevents clogging of sulfur

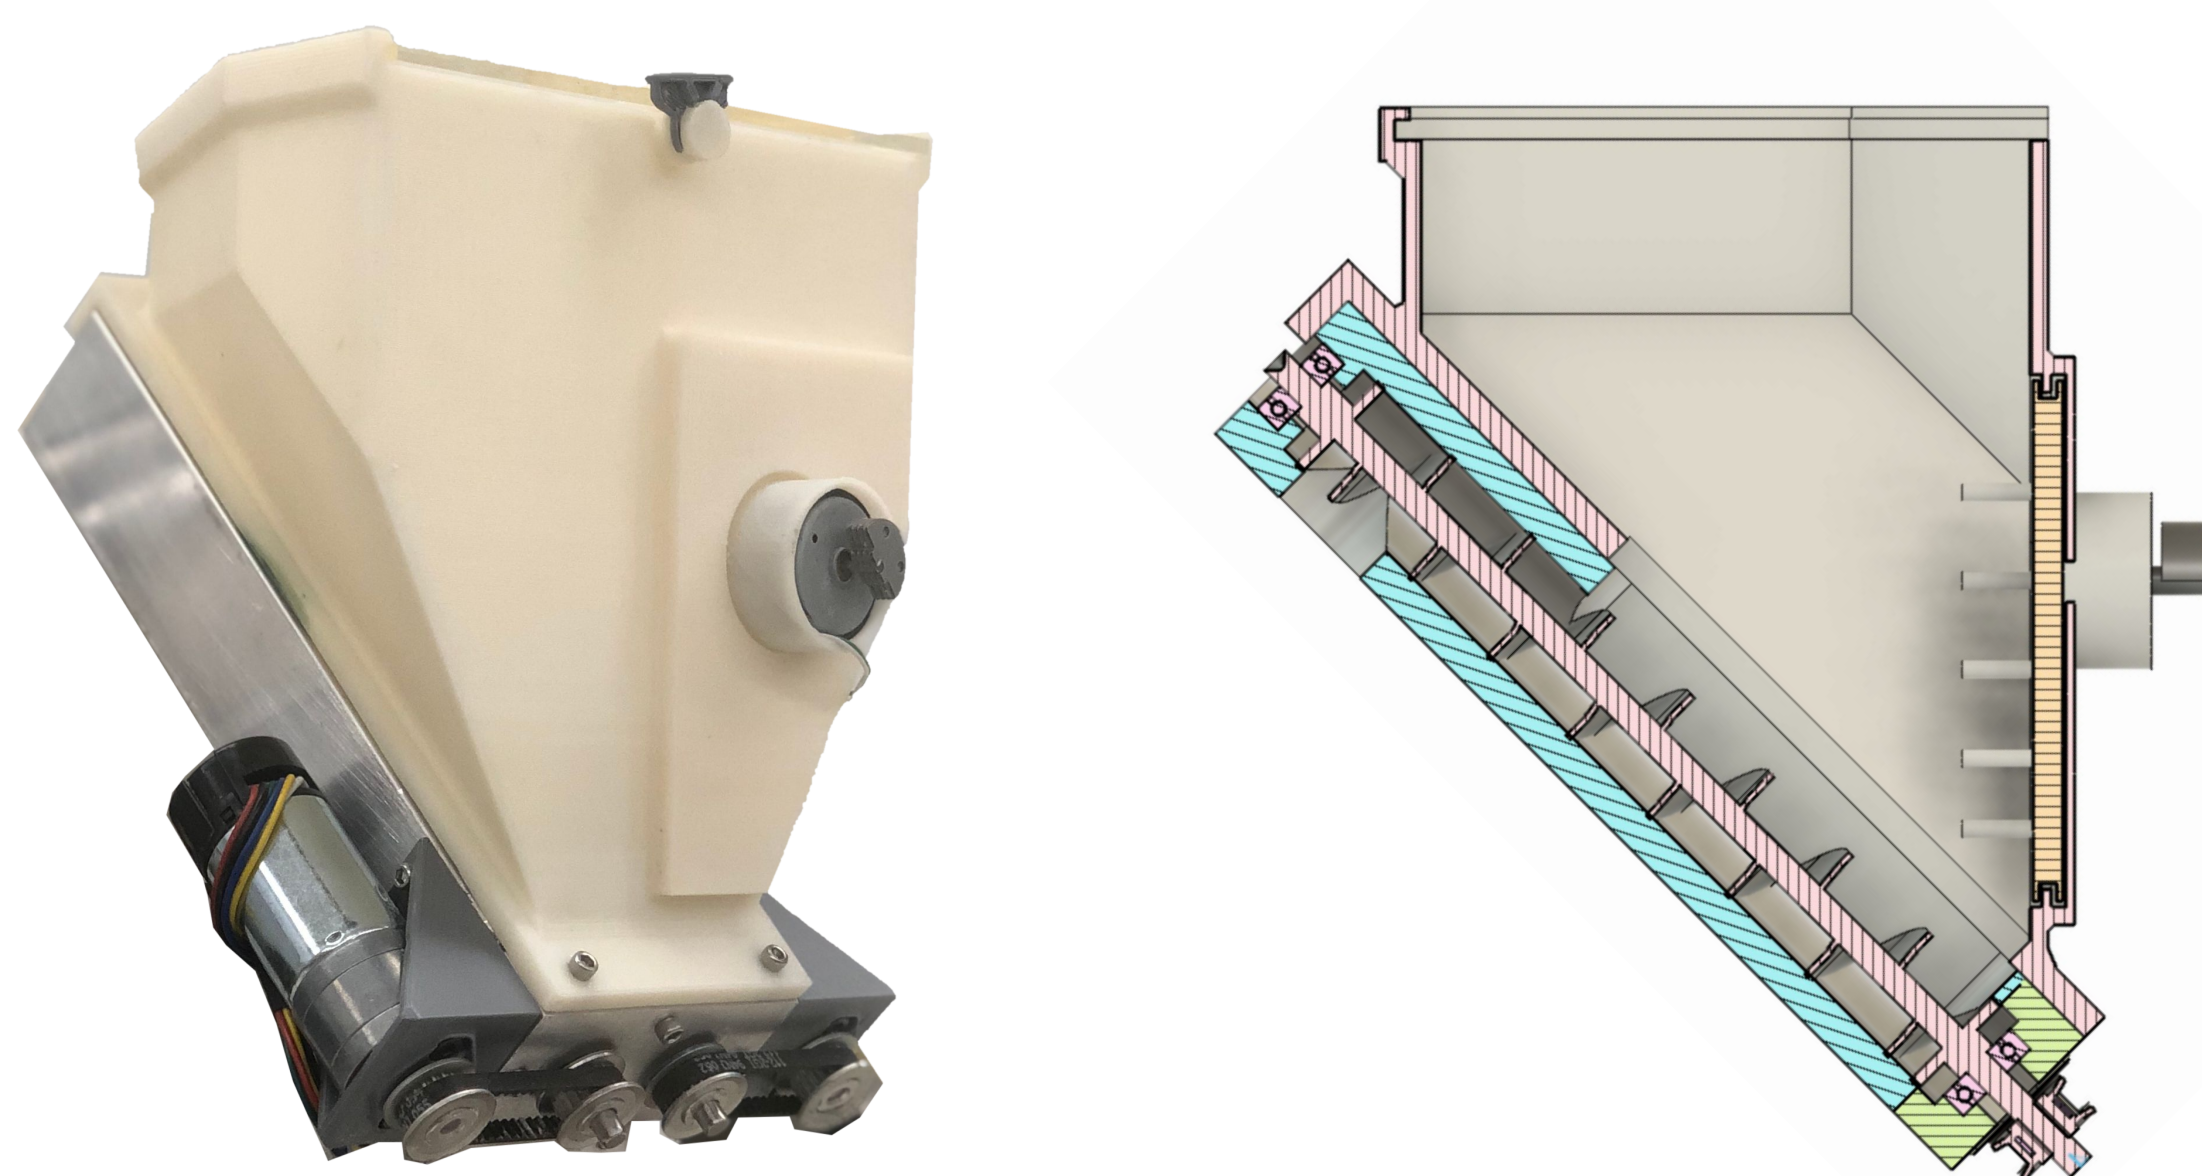

Mixing/Extrusion

Mixer goals:


- Evenly mix sand and sulfur
- Efficiently heat mixture
- Advance mixture into auger

Auger goals:

- Pressurize mixture for extrusion
- Maintain temperature

Manufacturing:

- Except for the auger, all parts were made in-house from a variety of materials
- Auger 3D-printed in stainless steel

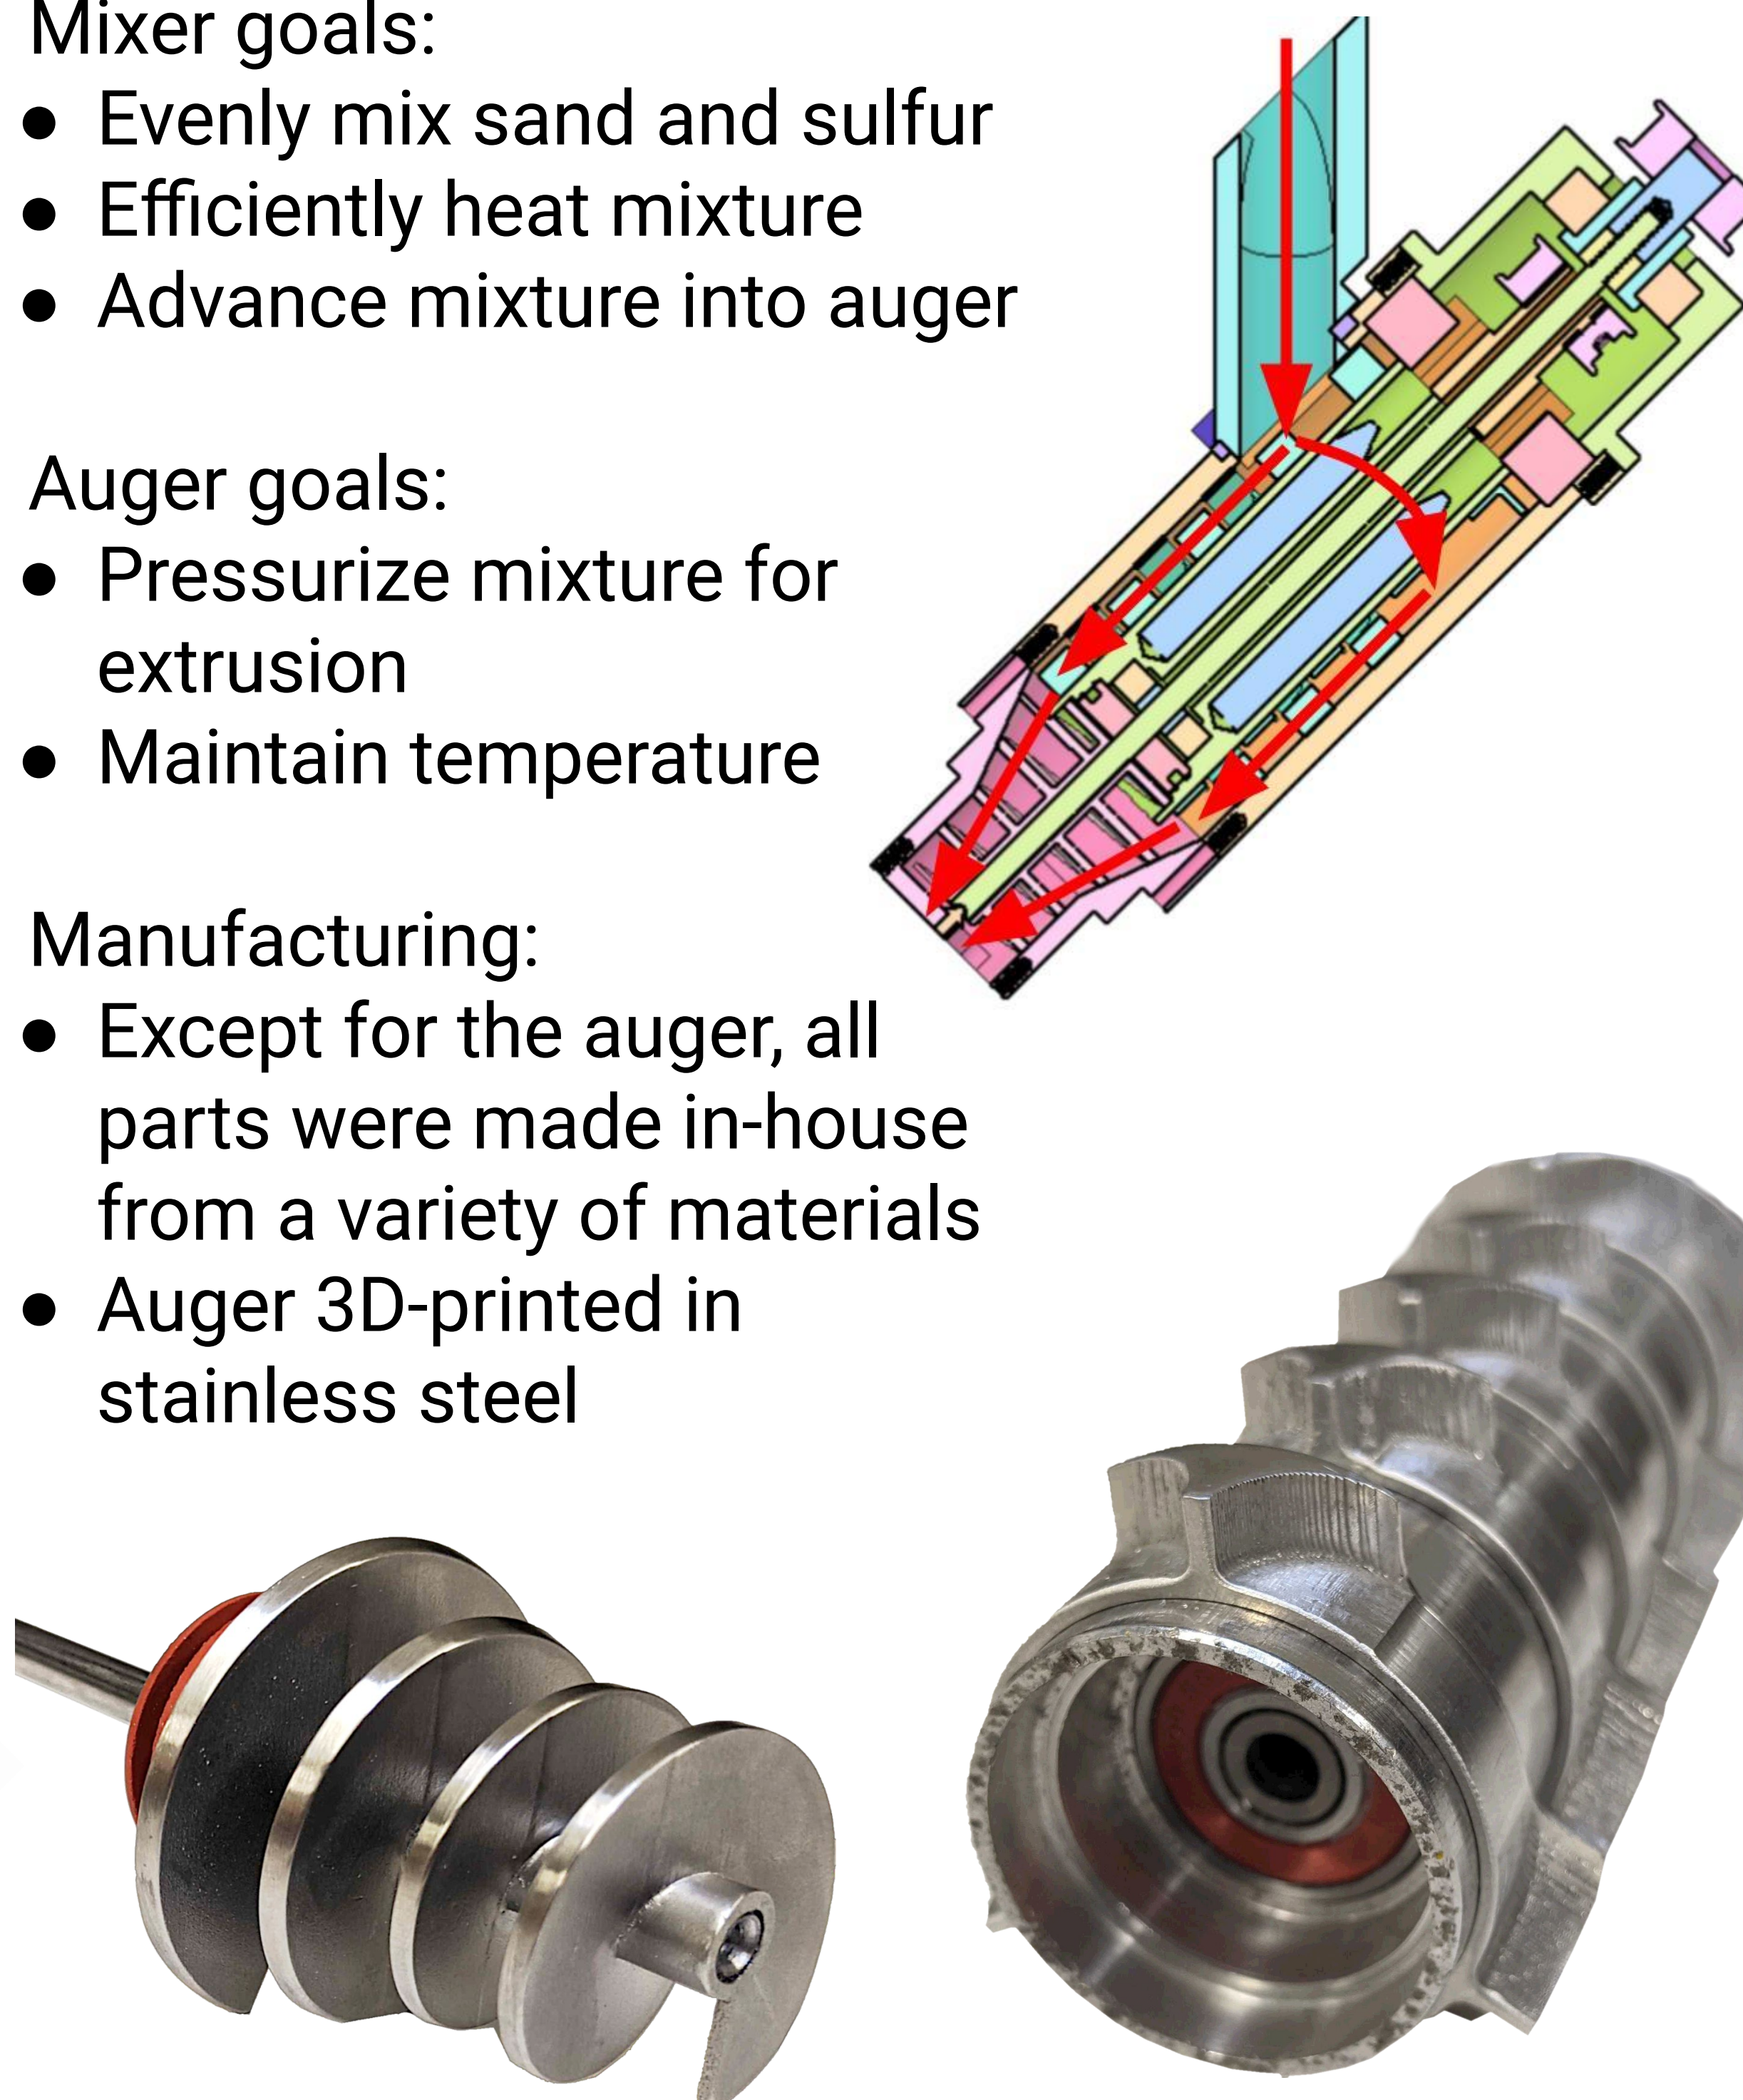


Heating

Controls Method:

- Designed a custom printed circuit board for heating and power control
- Custom derivative controller initialized with a Simulink model and first-generation test data.
- Thermocouples monitor temps of various zones
- Solid state relays provide power to the heater cartridges to maintain desired temperature

Precision:

- Maintained <4% steady-state error over time

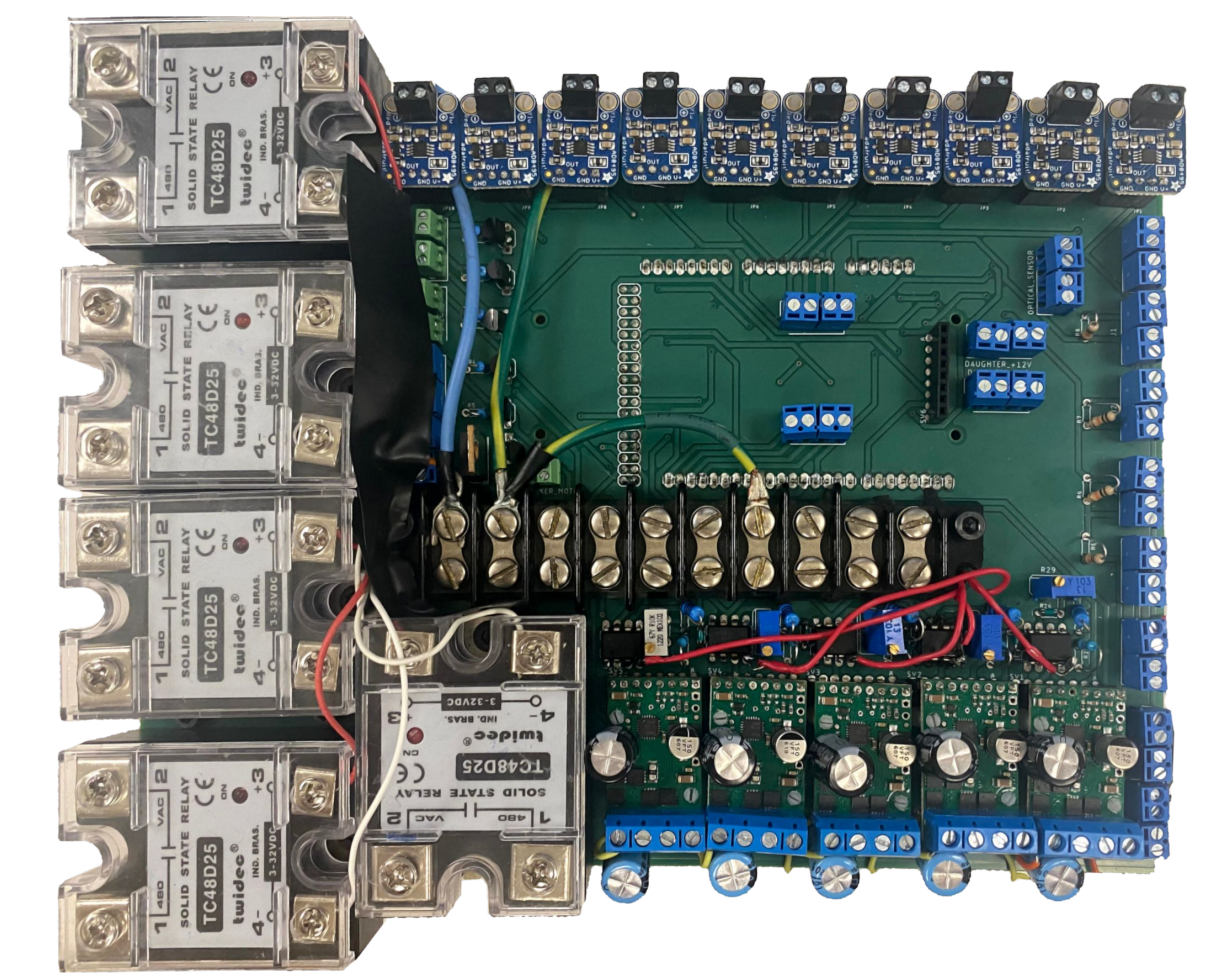

Efficiency Test

Method:

- Measured power for heating, mixing, and extruding ~2.2kg of sulfur-sand
- Recorded power usage across multiple 120V phase lines with LABView PM1000+ power analyzers

Results:

- The final test showed the Gen. II sulfur-sand printhead used 43% (0.65 MJ) less energy than the legacy system, well exceeding our initial goal of 15% increased efficiency

